

## DC-300-IP-20 USB3.0高清會議攝像機



DC-300-IP-20 是一款專業級FHD IP PTZ攝影機，支持IP，HDMI，SDI和USB3.0同時輸出，是廣播級AV解決方案，高端視頻會議和視頻監控應用的理想選擇。


### 特色:

- 採用最先進的DSP，1 / 2.8英寸5MP傳感器
- 20倍光學變焦+ 2倍數位變焦，61度視野
- 1080IP60 視頻IP，支援H.264，H.265編碼
- 支援POE：易於使用一條RJ45線纜獲取視頻，控制和供電
- IP，HDMI，SDI，USB輸出，適合不同的應用
- 平滑的PTZ機械設計，精確的上下左右電機控制
- 特殊聚焦算法：變焦或移動時快速精確的聚焦性能
- WDR，3D降噪功能
- 標準IP Visca，Serial Visca，Pelco-P / D控制協議；IP Visca over TCP / UDP。
- 隨附功能紅外遙控器，可通過OSD選項設置IP地址
- 自動訪問IP地址
- 128個預設
- 圖像翻轉功能，支持倒置安裝
- 支持菊花鏈功能

Output Interface



Dimensional Drawing ( mm )

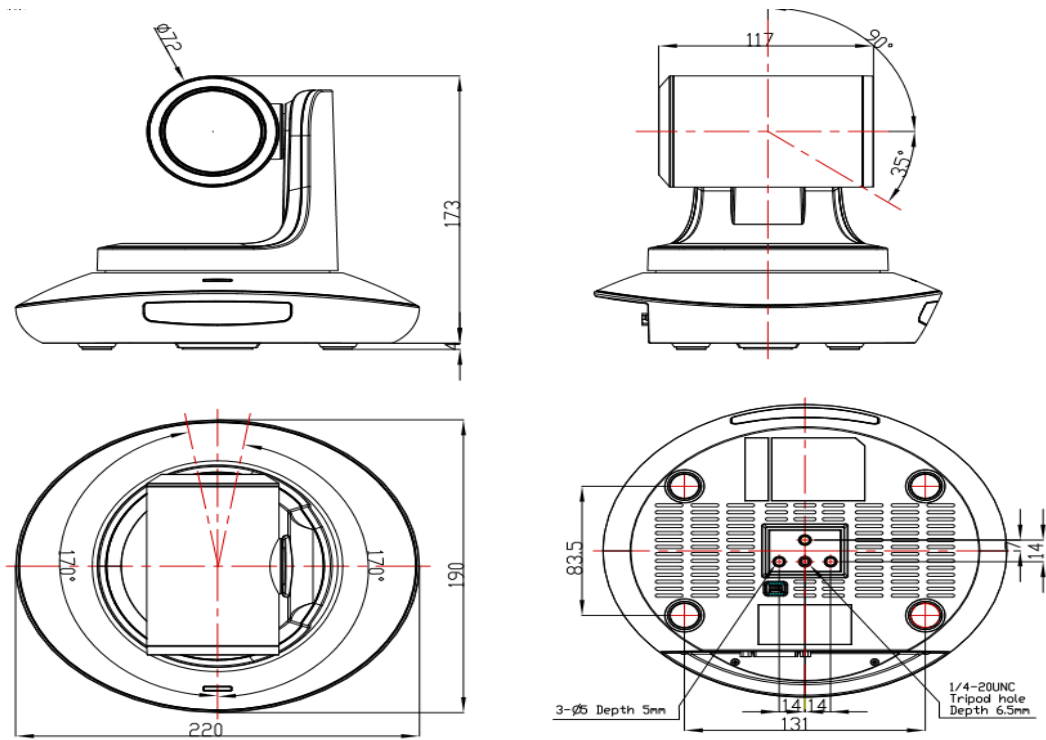

**Technical Spec**

Sensor	1/2.8 inch, 5mega pixel high quality CMOS sensor			
Video Format	HDMI	IP	SDI	USB3.0
	1920x1080P60/50/ 30/25 1280x720P60/50/30/25 1920x1080i60/50	Main stream: 1920x1080P60, Sub stream: 1280x720,704x576 640x480,352x288,	1920x1080P60/50/ 30/25 1280x720P60/50/30/25, 1920x1080i60/50	1920x1080P60/50/30/25 1280x720P60/50/30/25, 1024*576P30; USB2.0: 1280x720P25, 1024x576P30, 960x540P30, 640x360P30, 512x288P30, 352x288P30,
Zoom	20x optical zoom & 2x digital zoom			
FOV	61°(diagonal)			
F.no.	Wide: F1.5(Wide)~3.0 (Tele)			
Focal Length	f=5.2(near)~98mm(far)			
Preset	10 via remote controller; 128 via serial port; preset precision:0.1°			
Rotation Angle	Pan: -170° ~ +170°; Tilt: -30° ~ +90°			
Rotation Speed	Pan: 0°~120°/s ; Tilt: 0°~80°/s			
Control Port	RS232 / RS485/RJ45			
Video Port	HDMI/ RJ45/SDI/USB3.0/USB2.0			
Network Speed	1000M			
Noise Reduction	2D&3D			
SNR	>50dB			
Minimum Lux	0.01 lux			
White Balance	Auto / Manual/Auto Tracking/OnePush/Indoor/Outdoor/			
Anti Flicker	50Hz/60Hz/OFF			
D/N Mode	Supported			
Gamma	Supported			
Mirror Image	Supported			
PanTilt Flip	Supported			
Iris	Auto / Manual/			
Electric Shutter	Auto / Manual/			
BLC	Auto / Manual/			
Focus	Auto / Manual/			
Video Encoding	H.264/H.265			
Bit Rate Control	Variable Bit Rate, Constant Bit Rate			
Video Bit Rate	1024Kbps~30720Kbps			
Frames	50HZ:1fps~30fps 60HZ:1fps~30fps			
IP Protocol	TCP/IP, HTTP, RTSP, Onvif, DHCP			
POE	Supported			
Input Voltage	DC12V, 2A			
Dimension/ Net Weight	220mm×173mm×190mm/1.25KGS (2.8LBS)			